


## INDUSTRIAL FUSE-LINKS WITH BOLTED CONNECTIONS

## TYPE N&T

### 400/415 Volt Industrial Fuse-links to IEC 60269-2/BS 88-2

Rated voltages: 415V a.c. 250V d.c. Breaking Capacities 80kA d.c. Breaking Ranges and Utilisation Category gG/gM

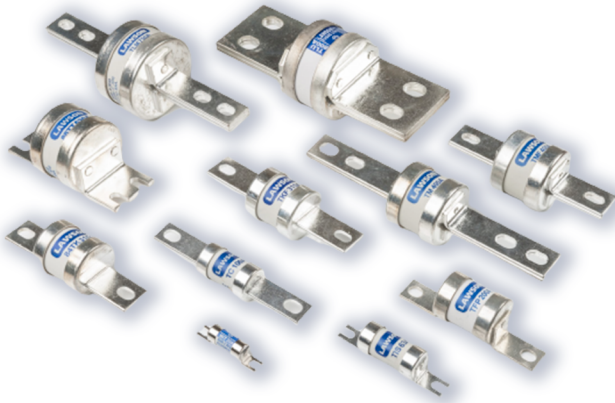

Lawson Type "N" & "T" fuse-links are for use in industrial installations and can be fitted into BS88 bolted fuse-holders and distribution fusegear.

Dimensions and current ratings of the Lawson type N&T Industrial Fuse-Links comply with the standardized requirements of IEC 60269-2 and BS 88-2.

Additional types and current ratings are included in the range. Lawson type N&T Industrial Fuse-Links can be fitted in Boltin Fuse-Holders.



## PRODUCT DETAILS

### OFFSET TAG FUSE-LINKS

List Reference	Current Rating (A)	BS88 Reference	Fixing Centres G1		Fixing Centres G2	
			mm	ins	mm	ins
NIT	2,4,6,10,16,20,25,32	A1	44.5	1 3/4		
TIA	2,4,6,10,16,20,25,32	A2	73	2 7/8		
TIS	35,40,50,63,80,100,125	A3	73	2 7/8		
TCP	6,10,16,20,25,32,40,50,63,80,100	A4	94	3 11/16		
CTFP	125,160,200	(as A4)	94	3 11/16		
TFP	125,160,200	(as A4)	94	3 11/16		
85TM	200,250,315,355,400	-	102	4	22	7/8
86TT	450,500,560,630,670,710,750, 800	-	102	4	22	7/8

### CENTRAL TAG FUSE LINKS

List Reference	Current Rating (A)	BS88 Reference	Fixing Centres G1		Fixing Centres G2	
			mm	ins	mm	ins
TB	2,4,6,10,16,20,25,32,35,40,50,63	-	97	3 13/16		
TBC	2,4,6,10,16,20,25,32,35,40,50,63	(as B1)	111	4 3/8		
TC	80,100	B1	111	4 3/8		
TF	125,160,200	B2	111	4 3/8		
84TF	80,100,125,160,200	-	99	3 29/32		
TKF	250,315	B3	111	4 3/8		
84TK	250,315	-	99	3 29/32		
TKM	125,160,200,250,315	-	133	5 1/4		
TMF	315,355,400	B4	111	3 11/16		
TM	250,315,355,400	C1	133	5 1/4	184	7 1/4
TMT	355,400	-	165	6 1/2	229	9
TTM	450,500,560,630	C2	133	5 1/4	184	7 1/4
TT	450,500,560,630	-	165	6 1/2	229	9
TLM	670,710,750,800	C3	133	5 1/4	184	7 1/4
TLT	670,710,750,800	-	165	6 1/2	229	9
TLU	450,500,560,630, 670,710,750, 800	D1	149	5 1/4	32	1 1/4